


Typical Design for Outsloped Road

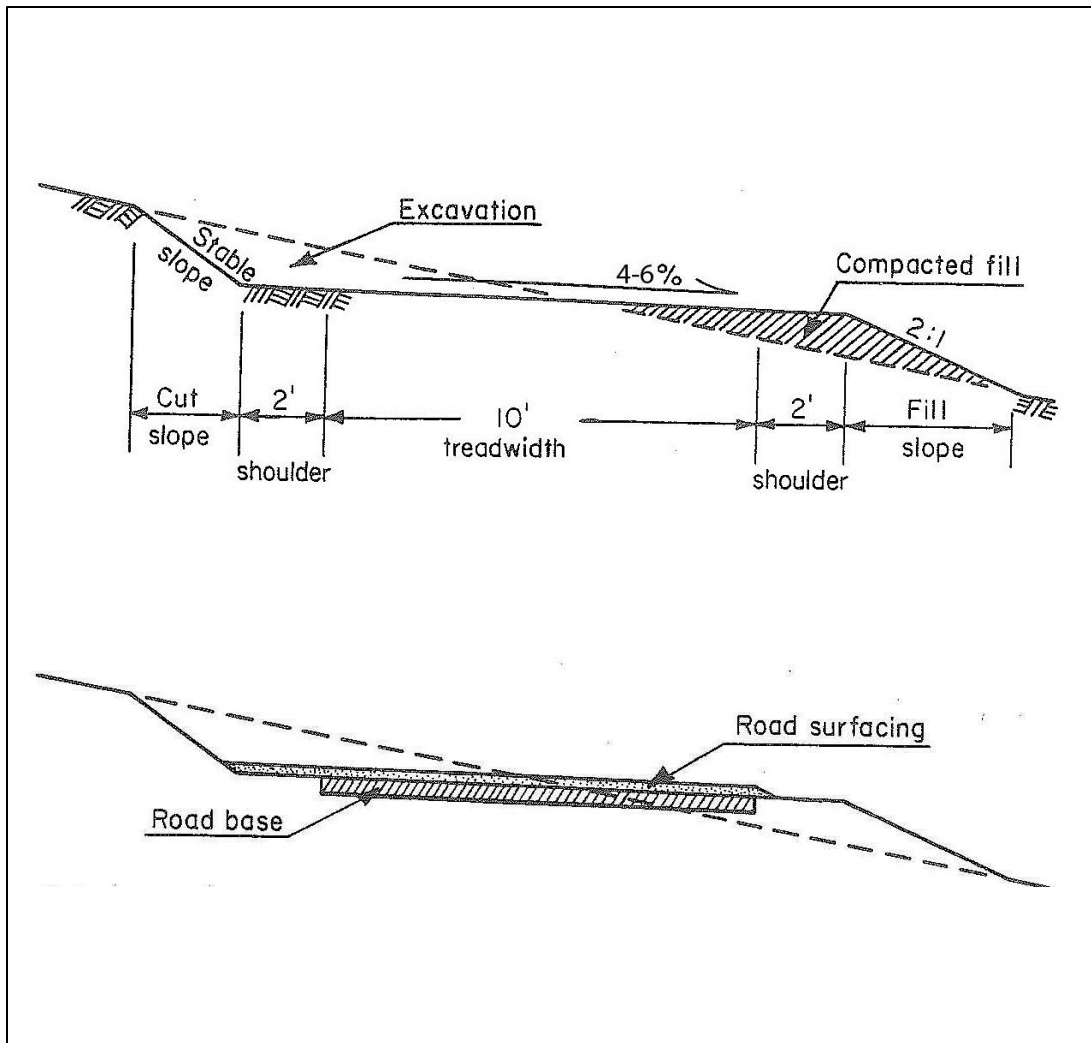

Outsloped Road Notes:

1. Road tread will have at least a 4% outslope, steepening to 6% outslope along outside shoulder to promote drainage.
2. Edge berms from grading will be completely removed – OR – install compacted edge berm with drainage outlets every 150'.
3. All road surface and fills will be compacted to 95% of ASTM D-698 before final grading.
4. Road base and surface to be designed for road use and site conditions.
5. Cut and fill slopes will be vegetated.
6. For two-lane road, add 6' of treadwidth.
7. For turnout, add 10' to treadwidth.